

# Traverwood Drive (Plymouth Rd to S Huron Pkwy)

← Project Extents →




## PROPOSED IMPROVEMENTS

- Add bike lane – east side\*
- Remove existing parking bay and relocate parking on-street to improve sidewalk accessibility adjacent to the Traverwood Library
- Add on-street parking – west side
- Remove and replace existing asphalt pavement to create a smoother surface
- Remove, replace, or update, as needed:
  - Sidewalk ramps, to comply with Americans with Disabilities Act (ADA)
  - Stormwater curb inlets
  - Segments of concrete curb and gutter
  - Driveway openings and approaches
  - Pavement markings
  - Traffic signage
- Restoration of lawn/turf disturbed by the construction activities

\*As identified in the City of Ann Arbor Non-motorized Transportation Plan


## EXISTING LANE CONFIGURATION

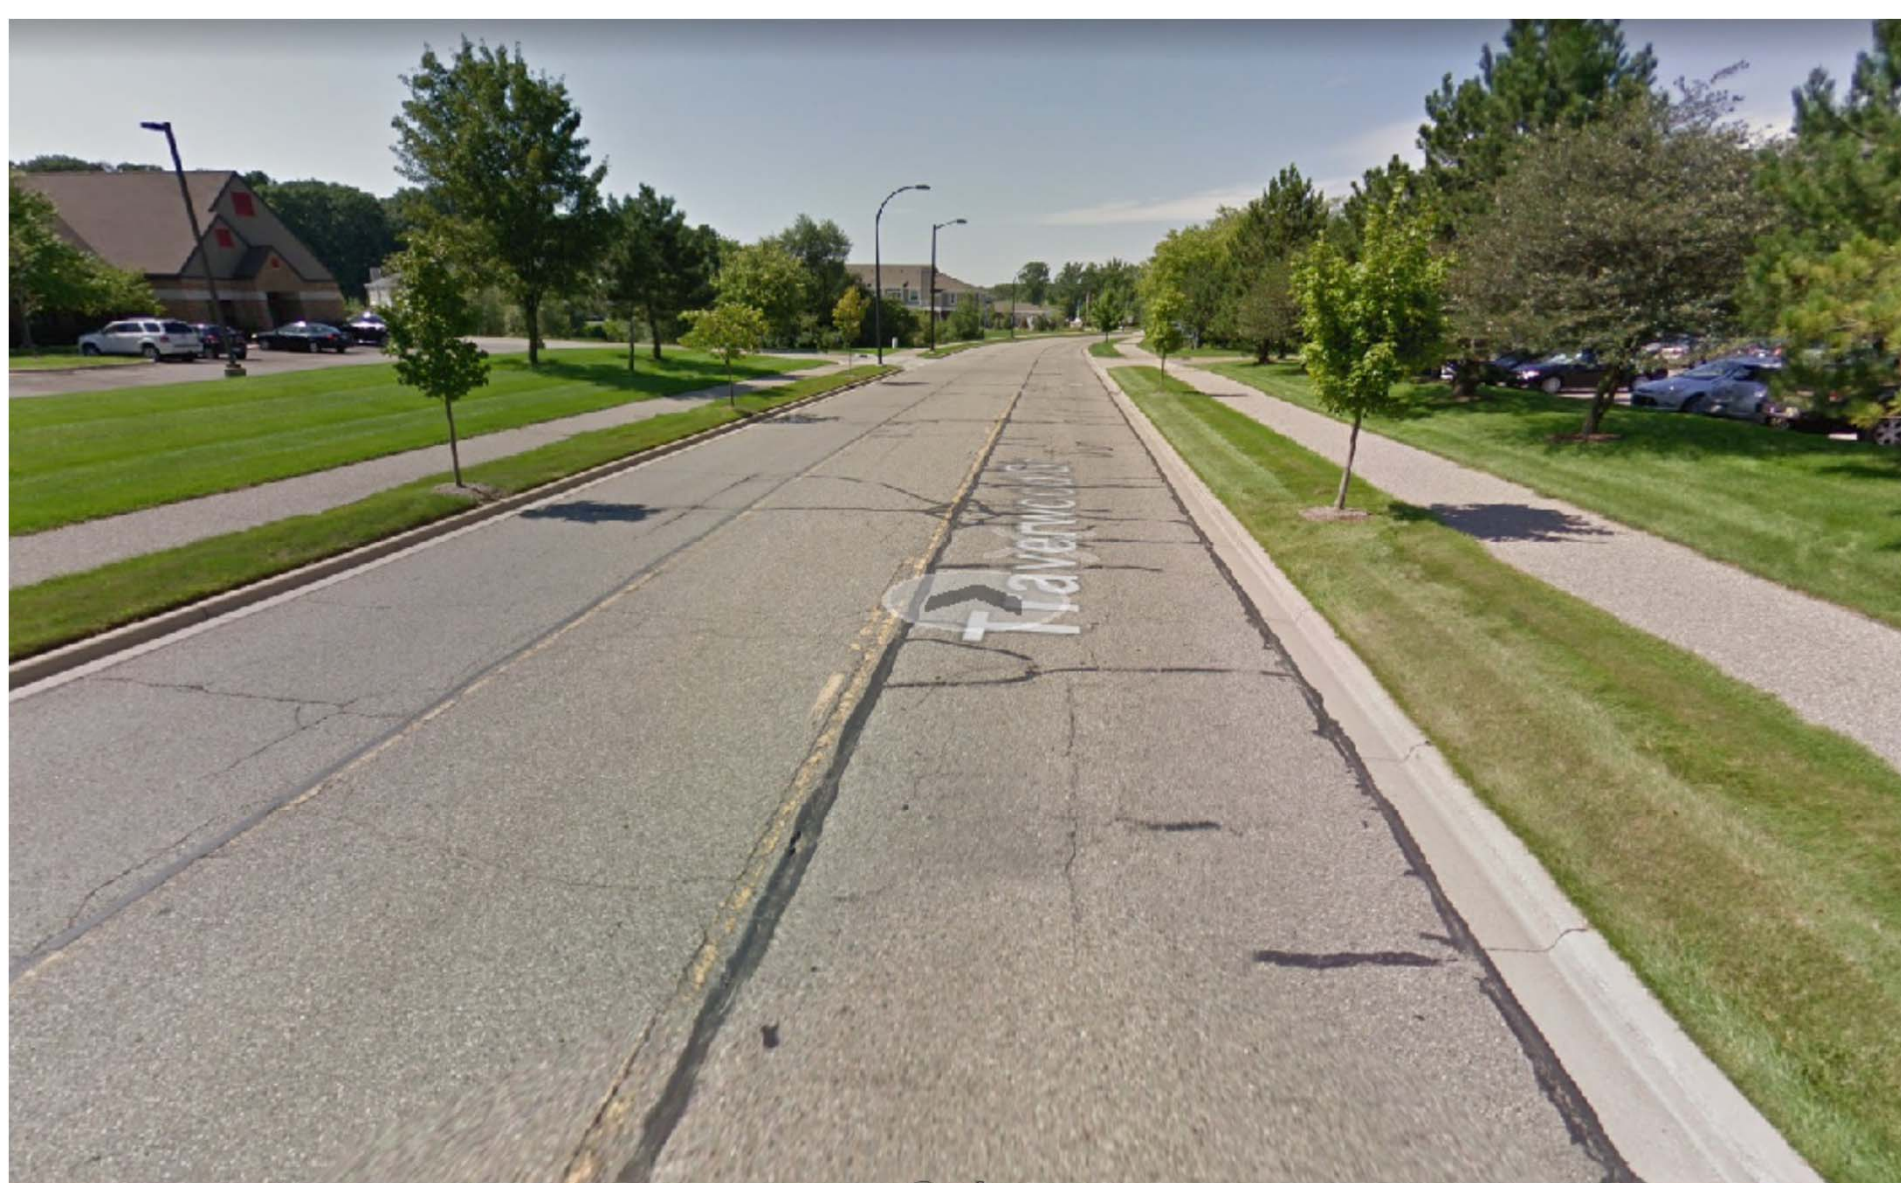

## PROPOSED LANE CONFIGURATION



## MAINTENANCE OF TRAFFIC

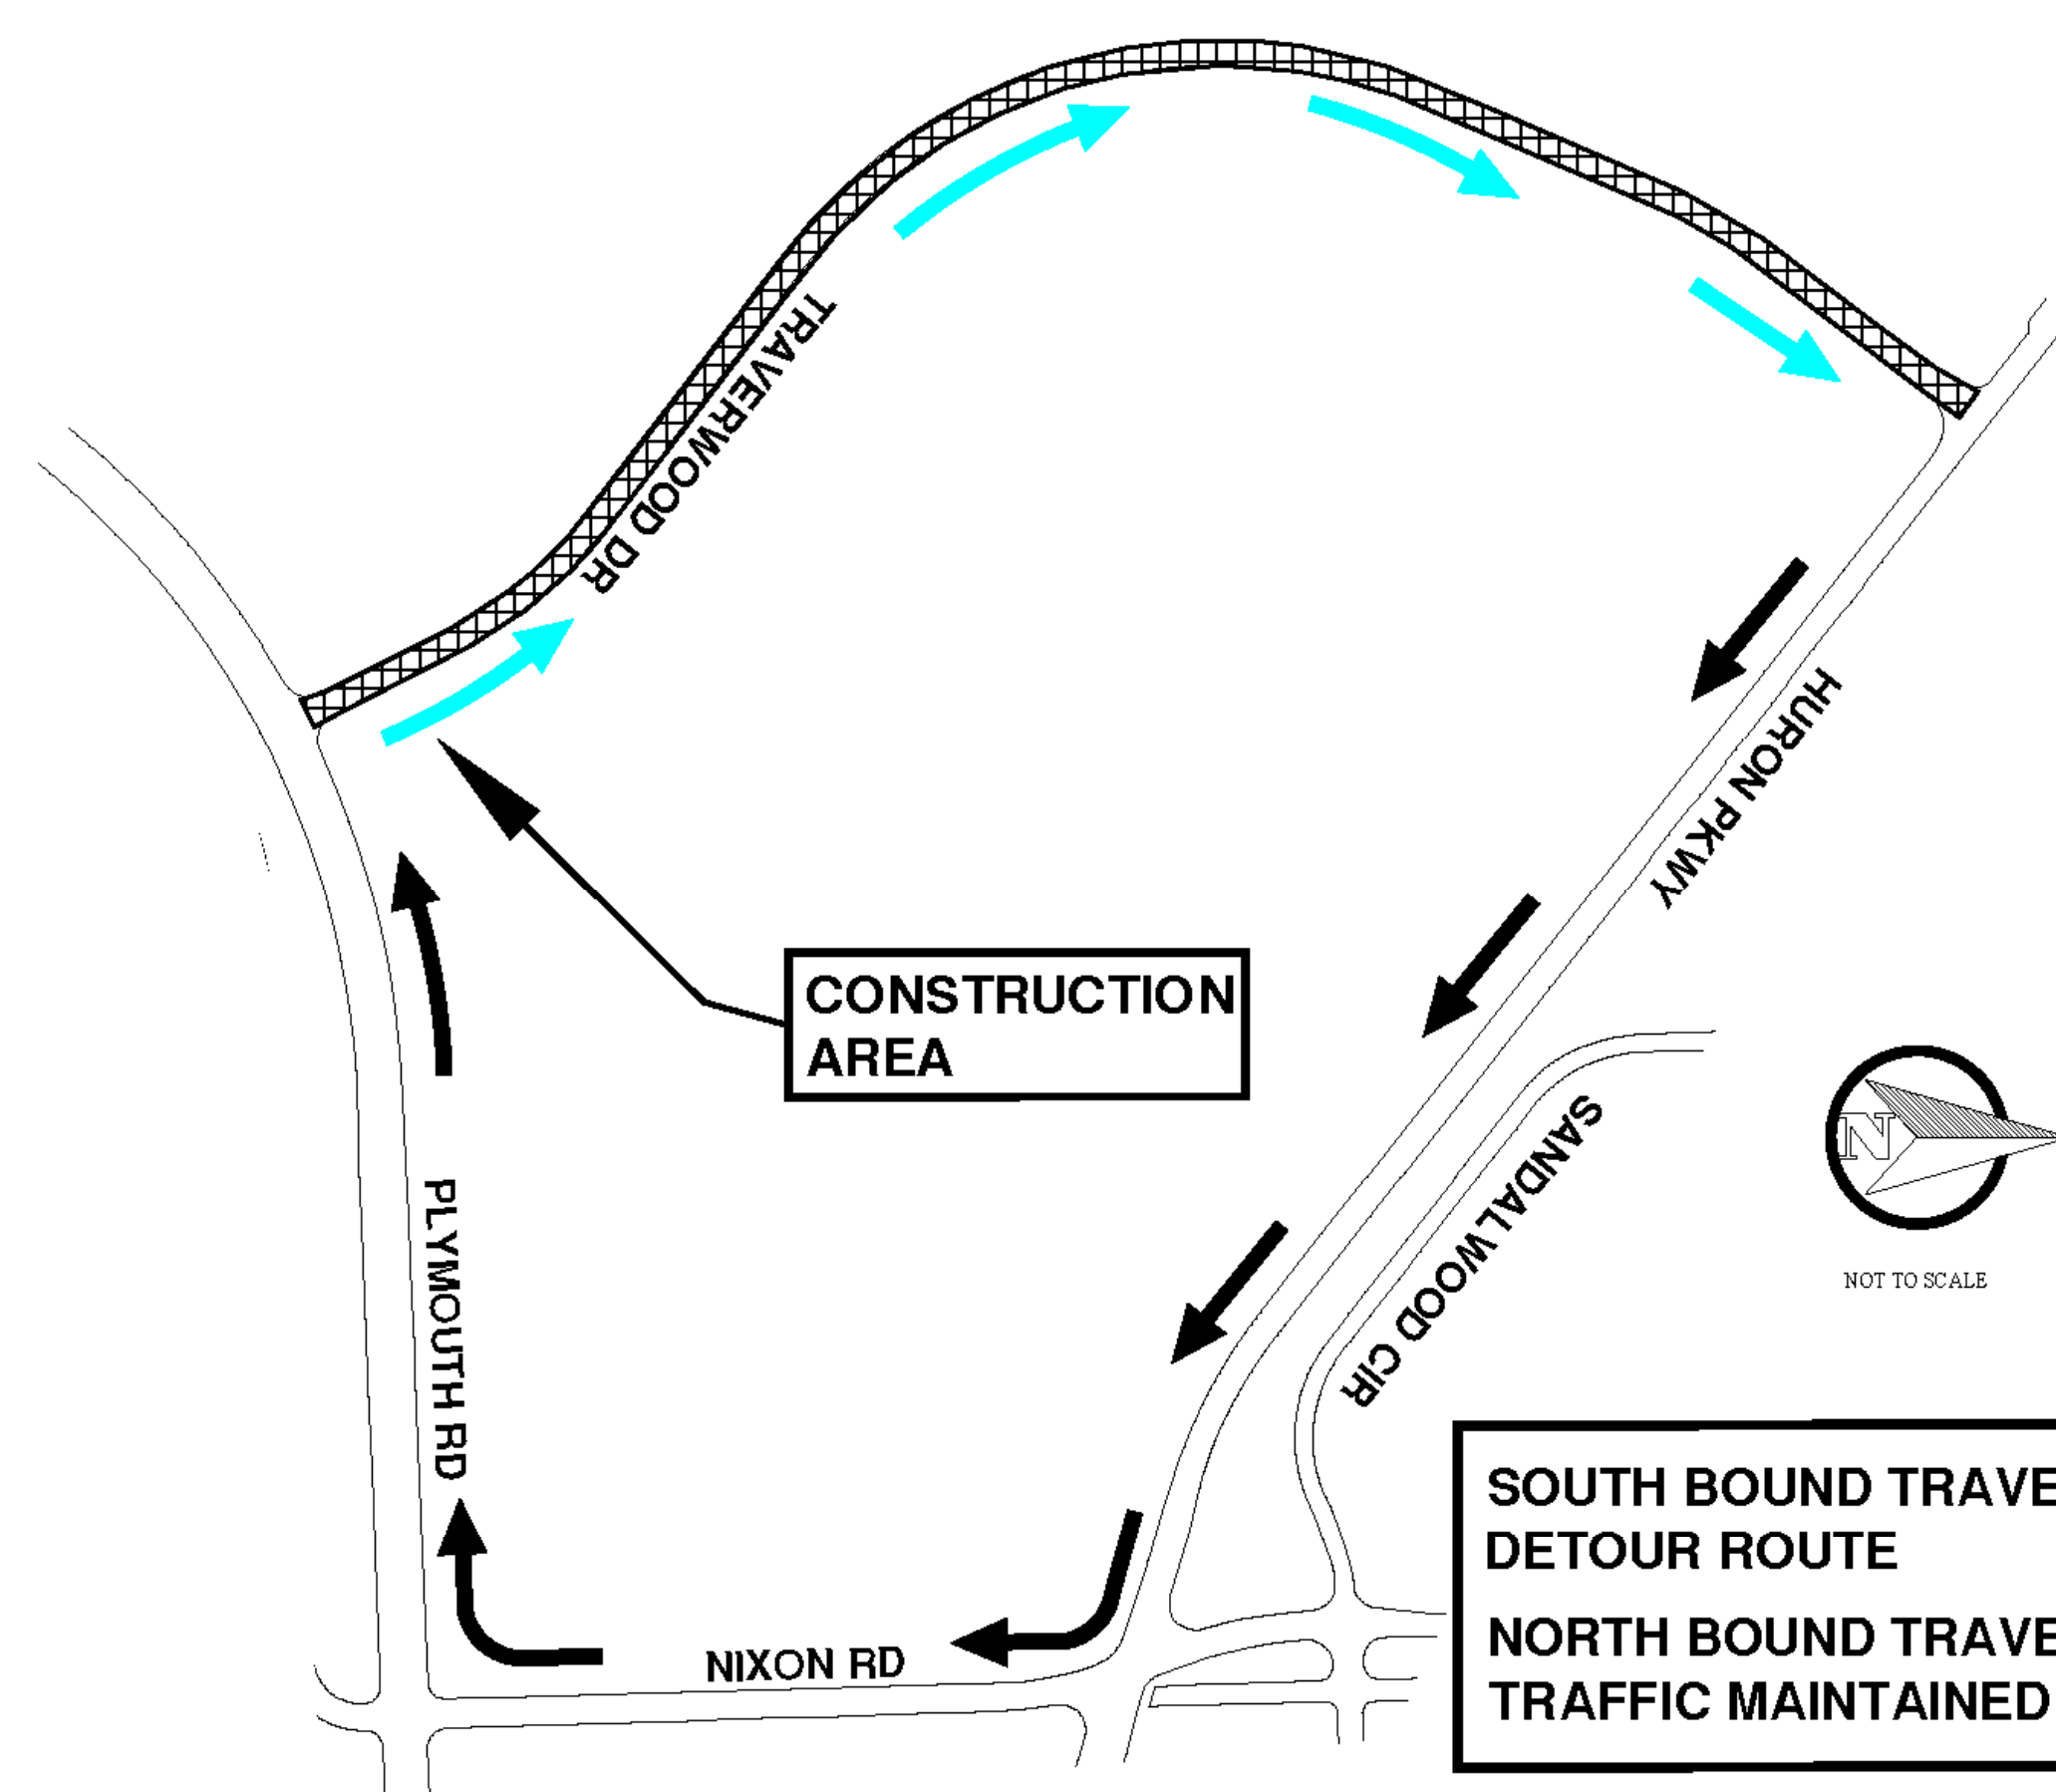

- South bound traffic detoured
- North bound traffic maintained
- Access to properties maintained
- Pedestrian traffic maintained

## TENTATIVE PROJECT SCHEDULE

- Construction timeframe: Between mid-June and late July
- Construction duration: Approximately 3 weeks within above timeframe